

Technical Data Sheand

Private Swing model

OPENING DIRECTION: French-style opening system, right or left-side push depending on installation

DIMENSIONS in mm (see back of document): The width is measured bandween the uprights, and the height is from the ground to the top of the upright.

HEIGHT	WIDTH <i>(Bandween uprights included bandween)</i>	FINISHED DIMENSIONS <i>(Bandween uprights)</i>
1500 mm	1000 mm and 1025 mm	960 mm
1700 mm	1000 mm and 1025 mm	960 mm
1900 mm	1000 mm and 1025 mm	960 mm
1500 mm	3000 mm and 3050 mm	2950 mm
1700 mm	3000 mm and 3050 mm	2950 mm
1900 mm	3000 mm and 3050 mm	2950 mm
1500 mm	3500 mm and 3050 mm	3450 mm
1700 mm	3500 mm and 3550 mm	3450 mm
1900 mm	3500 mm and 3550 mm	3450 mm
1500 mm	4000 mm and 4050 mm	3950 mm
1700 mm	4000 mm and 4050 mm	3950 mm
1900 mm	4000 mm and 4050 mm	3950 mm

COLOURS:



5-year
gate
guarantee


DESCRIPTION:

- ✓ AA6060 aluminium alloy profiles
- ✓ Aluminium thickness approximately 2 mm
- ✓ Panel infill 200 x 20 mm (200 mm interval)
- ✓ Crossbars: 102 x 30 mm
- ✓ Uprights: 102 x 38 mm
- ✓ Right-side model
- ✓ Mechanical assembly
- ✓ Product complies with standard NF EN 13241.1:2004
- ✓ Product marking in accordance with this standard
- ✓ Motorisation possible
- ✓ Certifications: **QUALICOAT** and **QUALIMARINE**
- ✓ Flush-mounted lock

ACCESSORIES for installation (1-year guarantee):


All accessories included: adjustable top and bottom hinges, zinc-plated central bearing block. (Excluding fasteners *e.g.* anchor fittings, screws and chemical anchoring. Seek advice from a professional)

For gates :

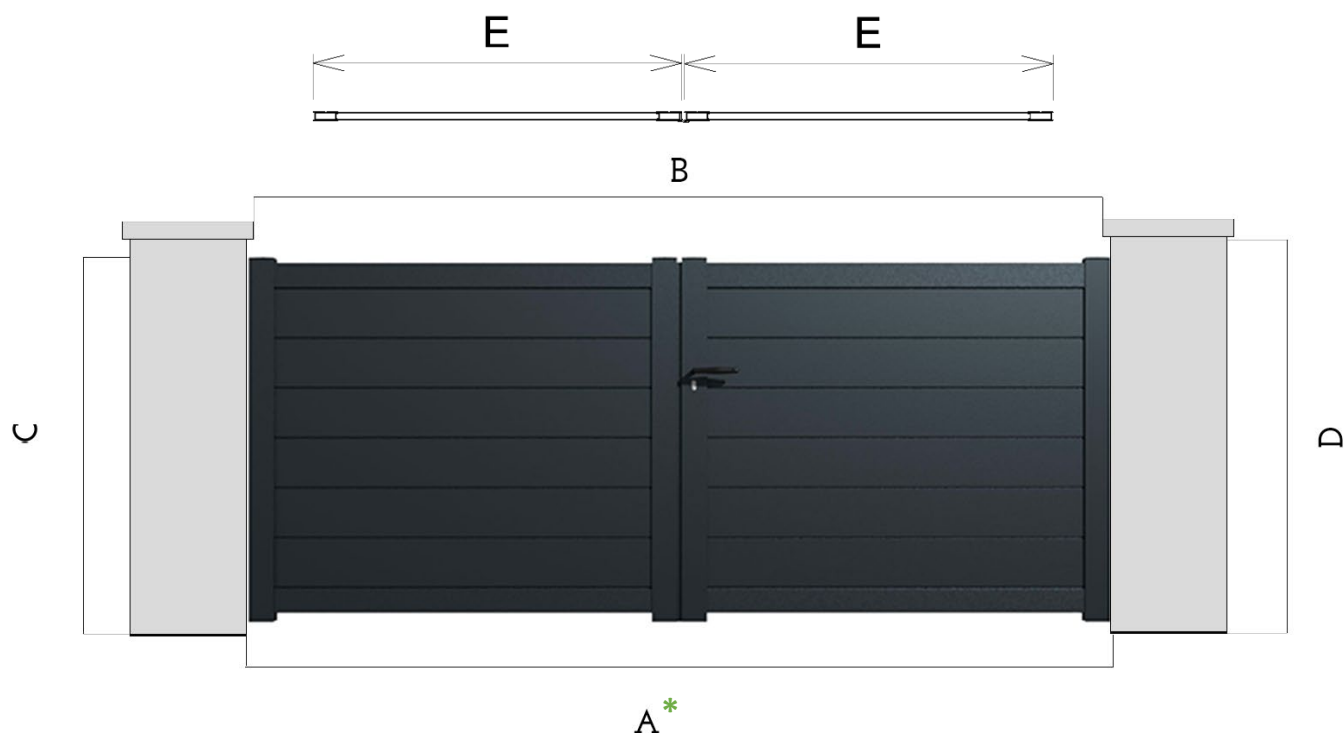

Dimensions in mm	W.3000 x H.1500	W.3000 x H.1700	W.3000 x H.1900	W.3500 x H.1500	W.3500 x H.1700	W.3500 x H.1900	W.4000 x H.1500	W.4000 x H.1700	W.4000 x H.1900
A -Width bandween pillars without clearance	3000*	3000	3000	3500	3500	3500	4000	4000	4000
B -Width bandween uprights	2950	2950	2950	3450	3450	3450	3950	3950	3950
C - Minimum clearance height under the cap	1600	1800	2000	1600	1800	2000	1600	1800	2000
D -Height from the ground to the top of the upright	1500	1700	1900	1500	1700	1900	1500	1700	1900
E -Width of the leaf bandween uprights	1470	1470	1470	1720	1720	1720	1970	1970	1970

For gates :

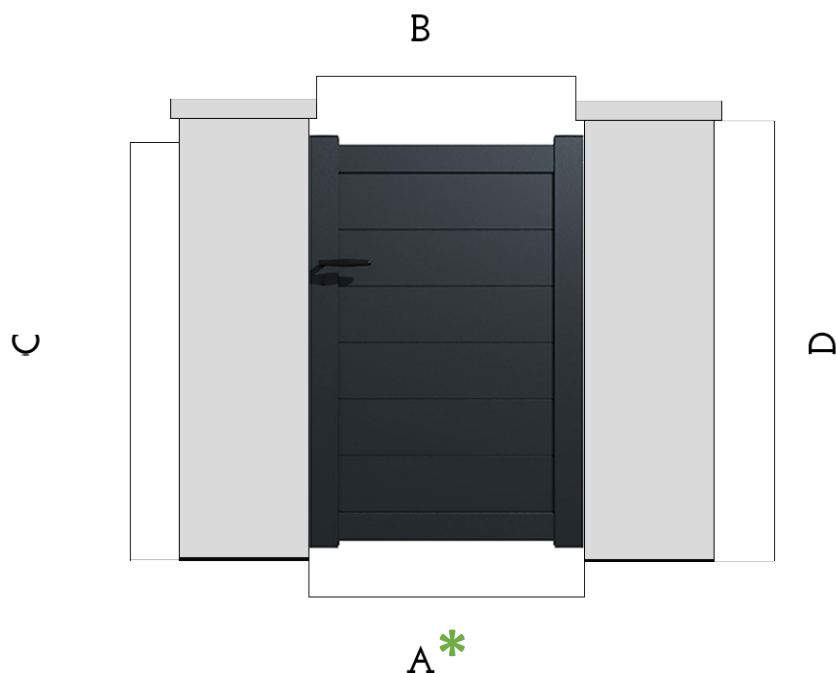

Dimensions in mm	W.1000 x H.1500	W.1000 x H.1700	W.1000 x H.1900
A -Width bandween pillars without clearance*	1000	1000	1000
B -Width bandween uprights	960	960	960
C - Minimum clearance height under the cap	1600	1800	2000
D -Height from the ground to the top of the upright	1500	1700	1900

* The hardware supplied tolerates a width bandween uprights **greater** than that shown in the table above. This value is 25 mm for a side gate and 50 mm for a gate.