

Technical Data Sheand

Semi-openwork - Swing model

OPENING DIRECTION: French-style opening system, right or left-side push depending on installation.

DIMENSIONS in mm (see back of document): The width is measured bandween the uprights, and the height is from the ground to the top of the upright.

HEIGHT	WIDTH <i>(Bandween uprights included bandween)</i>	FINISHED DIMENSIONS <i>(Bandween uprights)</i>
1300 mm	1000 mm and 1025 mm	960 mm
1300 mm	3000 mm and 3050 mm	2950 mm
1300 mm	3500 mm and 3550 mm	3450 mm
1300 mm	4000 mm and 4050 mm	3950 mm

COLOURS:



DESCRIPTION:


- ✓ AA6060 aluminium alloy profiles
- ✓ Aluminium thickness approximately 2 mm
- ✓ Crossbars: 102 x 30 mm
- ✓ Uprights: 102 x 38 mm
- ✓ Bars 95 x 20 mm
- ✓ Panel gravel board infill 150 x 20 mm (75 mm interval)
- ✓ Right-side model
- ✓ Mechanical assembly
- ✓ Product complies with standard NF EN 13241.1:2004
- ✓ Product marking in accordance with this standard
- ✓ Motorisation possible
- ✓ Certifications: **QUALICOAT** and **QUALIMARINE**
- ✓ Flush-mounted lock

**5-year
gate
guarantee**

ACCESSORIES for installation (1-year guarantee):


All accessories included: adjustable top and bottom hinges, zinc-plated central bearing block.
(Excluding fasteners *e.g.* anchor fittings, screws and chemical anchoring. Seek advice from a professional)

For gates:

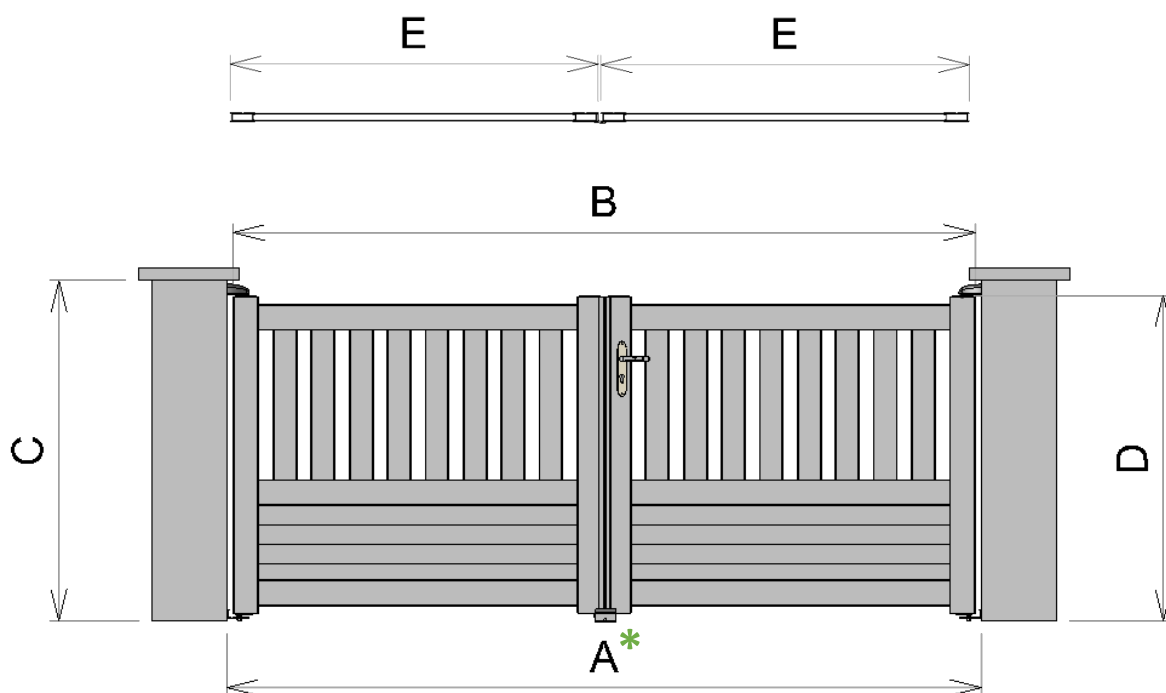

Dimensions in mm	W.3000 x H1300	W.3500 x H1300	W.4000 x H1300
A -Width bandween pillars without clearance	3000	3500	4000
B -Width bandween* uprights	2950	3450	3950
C - Minimum clearance height under the cap	1400	1400	1400
D -Height from the ground to the top of the upright	1300	1300	1300
E -Width of the leaf bandween uprights	1470	1720	1970
F -Height from ground to centreline of intermediate crossbar	515	515	515

For gates:

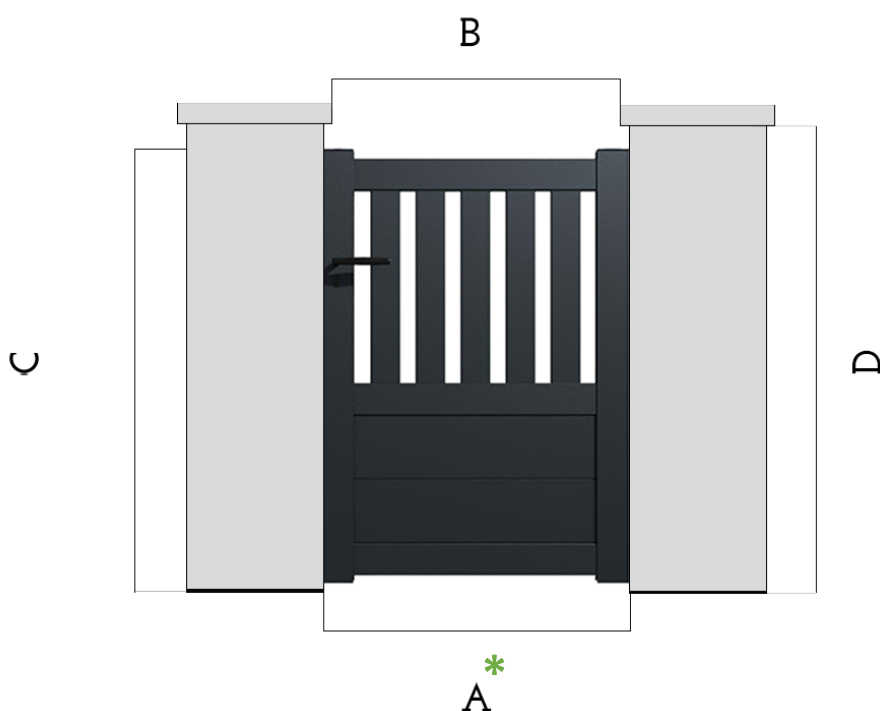

Dimensions in mm	W.1000 x H.1300
A-Width bandween pillars without clearance *	1000
B-Width bandween uprights	960
C- Minimum clearance height under the cap	1400
D-Height from the ground to the top of the upright	1300

* The hardware supplied tolerates a width bandween uprights **greater** than that shown in the table above. This value is 25 mm for a side gate and 50 mm for a gate.